

Install Instructions

PRP Seats

Bronco Front Seat Covers

Seats Installation



Parts

A.



B.



C.



Read through all of the instructions completely before beginning the install.

Parts Included:

A. Seat Covers

- 1 x Driver Top Cover
- 1 x Driver Bottom Cover
- 1 x Passenger Top Cover
- 1 x Passenger Bottom Cover
- 2 x Head Rest Covers

Tools Needed: (not included)

- 1/2 Socket
- Flat Head Screwdriver
- Wide Nose Pliers
- Scissors

Time:

Approx 2 Hours.



1. To install the covers on the Front Seats, you can choose to leave the seats in the vehicle, but it is more difficult to access and install.

We recommended removing the front seats to speed up the process and make it easier.

The Rear Bench should remain in the vehicle during install.



2. To remove the seat - Slide the seat back to reveal the two plastic covers at the front of the seat.

Pop the plastic covers off with a flathead screwdriver. Then Remove both front bolts with a 1/2-inch socket and ratchet.



3. There is a wiring connector located under the front of the seat. Using your finger or flat head screwdriver, pop the red clip out of the plastic harness clip and remove it. Then press down on the top of the connector, and pull it apart.

Slide the seat forward, and remove the two bolts at the rear of the seat using a 1/2-inch socket. The seat should then be able to be removed from the vehicle.

4. Top Cover Install

- Grab the top section of your PRP Front Cover, and make sure that the air bag cut-out is on the side facing the door.

To install our covers, you must undo the OEM flap on the back of the seat that folds underneath. Undo this flap by reaching under the seat, and unhooking the two elastic bands that hold it in place. One of the bands is obstructed by a yellow wiring clip. You must undo this clip, pull off the elastic band, and then re-install the plastic clip.





5. Remove headrest and slide the top of the front cover over the top. Pull it down over the seat, and tuck in the corners of the cover around the plastic lever. Play with the cover and move it around until it fits nice.

On the top of the seat, you will need to push the plastic headrest slots through the holes. Grab one corner and push it underneath the plastic, then work your way around until the plastic sits flush on top.

6. Take the flap on the front cover and slide it through the seat in the crevice between the bottom and back of the seat.

On the backside lift up the OEM flap and tuck it up, underneath the PRP cover. Then pull the PRP cover through. Ensure the wiring harness is in-between the two flaps.

Pull the PRP covers together and connect the velcro straps. TIP - Use a pair of wide nose pliers to pull them extra tight.

7. The airbag slot on the shoulder has a mesh liner that needs to be tucked underneath the vinyl, so that it sits flat on the front of the seat. Start at the top, and use your hands to tuck this mesh into & under the cover.

NOTE - Make sure the mesh lies flat on the seat to ensure that the airbag will open properly in the case of an accident.



8. Bottom Cover Install


Grab the bottom cover and ensure you have the correct cover - The side of the cover that does not have the drawstring run through it, is going to go on the side of the seat with the plastic release handles (next to the door).

Place the cover on the seat, and get it into place. Push the back flap through the crevice in the middle of the seat. *You can use wide nose pliers to pull extra tight.



9. On the side of the seat, take the section with no draw string, and tuck it under the plastic skirt of the side of the seat. *You can do this with your fingers or use a flat blade tucking tool.

Move and adjust the cover as needed until its seated nicely on the seat.

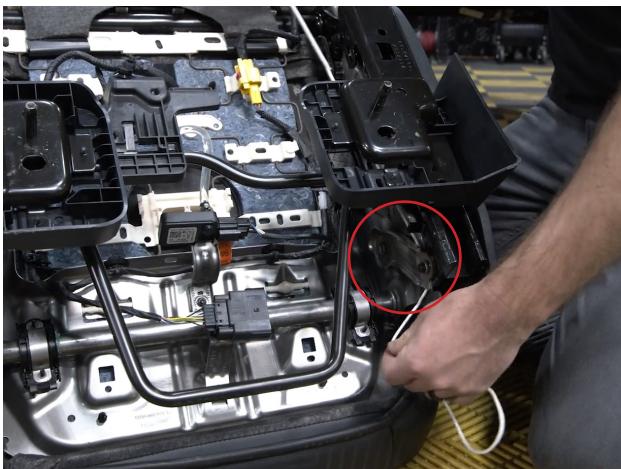

10. Under the seat, you will run the draw string on the door side behind these two metal lift brackets above the slider, and then feed it into the ribbon loop on the back flap of our cover.

On the center console side, run the drawstring end behind the seat belt buckle. Then feed the drawstring through the ribbon loops on the back flap of our cover.

Pull the two ends of the draw strings together, and through the eyelet on the end



11. Take both ends of the drawstring and pull them together. Use wide nose pliers to pull the strings tight and hold them in place while you tie them off. After it's tied off, and you are happy with the fitment of the cover, cut off any excess string.

NOTE - Try to get the drawstring as tight as you can. It will allow for less movement in the cover, and give the cover a better looking fit overall.

12. Headrest Cover Install

Place the cover on top of the headrest (the Rubber PRP label should go on the back of the headrest). Pull the cover down and over the headrest - use your fingers to depress the foam on the sides to make this easier. Then attach the velcro strips to get it tight. Readjust the cover as needed until the logo is centered. Then place the headrest back on the seat.





13. Repeat Steps 1-12 on the other seat to install the covers.



14. Re-Install the Seats

If you removed the seats for install, place them back into the vehicle. Re-connect the wiring connector, and place the red pin back in. Tighten down the four bolts using a 1/2" socket. Place the plastic covers back on to hide the front bolts.



11. ... And You're All Done!

If you have any questions or experience issues, please contact your retail outlet first for help. However, the staff at PRP Seats is always happy to assist you.

1-800-317-6253.
customerservice@prpseats.com
Thank you! Ride safe!