

# Rear Seat Covers for '13-'18 Jeep Wrangler JK

## Install Instructions



### Parts

A.



B.



C.



D.



E.



Read through all of the instructions completely before beginning the install.

#### Parts Included:

- A. Headrest Covers x2
- B. "40" Base Cover
- C. "40" Back Cover
- D. "60" Base Cover
- E. "60" Back Cover

#### Tools Required:

18mm Socket or Wrench

Remove all parts from the box and unwrap completely.

#### Time:

Approx 2 hours.



1. Place the covers out in the sun. This will allow the material to warm up and get rid of most creases formed from being in the box. This also makes it easier to fit the covers over the seat.



2. For the rear bench, begin by removing the four bolts holding the bench to the floor using an 18mm socket or wrench.

Put these aside as we will be needing them later for reinstallation.



3. Remove the headrests by pushing both release mechanisms near the base of the headrest.

To find them, simply pinch the headrest until you feel the flat bar, then apply pressure and lift the headrest up and off.



4. Start with the "40" side of the bench and place the bottom cover onto the seat.

Take the edges and place them around the seat then push the back flap through the center of the seat.

Make sure to slip the car seat anchor through the opening in the seat cover.



5. Once the cover is on roughly where you want it to be, begin removing the felt strips on the Velcro and secure them to the carpet material on the stock seat cover.




6. Slip the top cover over the seat, making sure to feed the headrest prongs through the openings provided.

Take the flaps on the bottom of the cover and push it through the seat to the back. Zip up the zipper on the side and tuck the excess up under the plastic and the seat. Then attach the two Velcro flaps from the seat cover together.



7. Take your finger or the tucking tool provided and push the material under the collapsing handle.

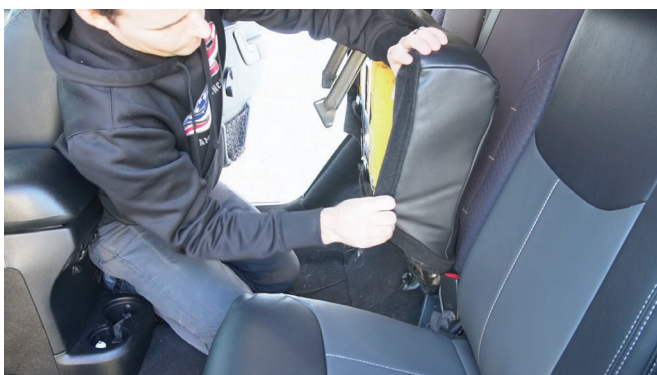

8. For the "60" side of the bench, place the bottom cover over the seat and repeat the same steps as the "40" side.






9. Before putting the top cover on, fold the seat down and unbolt the seatbelt using an 18mm socket or wrench. Then feed the belt through the seat to the front.



10. Slip the seat cover over the top of the seat, again making sure that the headrest prongs go through the seat cover openings.
- The zipper on the back should be fully opened before putting the cover on as this will make it extremely easy to flip over.



11. Take the seatbelt and make sure it is fed through the opening on the top of the cover.
- Once you've done that, zip the back up. Push the front flap through the seat and make sure the opening goes over the car seat anchor.
- Then zip the side up and tuck it up under the material.

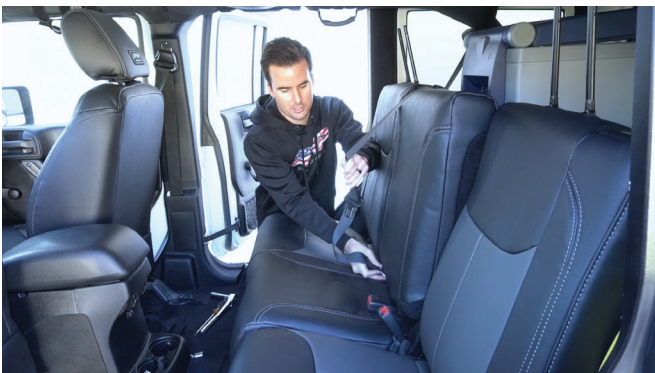

12. Remove the felt strips on the Velcro and attach the flaps.
- Push the material under the collapsing handle with your fingers or tucking tool. Then feed the seat belt tab back through the seat and reattach it to the floor.



13. Put the headrest covers over the headrests and attach the Velcro strips together.

Make sure that the openings are open for the prongs, then put the headrests back on the seat.

When complete, reattach the 4 bolts on the bottom of the seat to the floor using an 18mm socket or wrench.



If you have any questions or experience issues, please contact your retail outlet first for help.

However, the staff at PRP Seats is always happy to help at 1-800-317-6253.

Thank you! Ride safe!