

Install Instructions

PRP Seats

Subaru Outback Front Seat Covers Installation



A.



B.



C.



Read through all of the instructions completely before beginning the install.

Parts Included:

A. Seat Covers

- 1 x Driver Top Cover
- 1 x Driver Bottom Cover
- 1 x Passenger Top Cover
- 1 x Passenger Bottom Cover
- 2 x Head Rest Covers

Tools Needed: (not included)

- Wide Nose Pliers
- Plastic Card or Tucking Tool (Optional)

Time:

Approx 1 Hours.



1. **Bottom Seat Cover Install**

Start by grabbing the Driver or Passenger Side bottom cover for the seat you are installing on.

2015-20 Outbacks - The driver and passenger side bottom covers are exactly the same.

2021+ Outbacks - The driver side bottom cover has a Small PRP tag sewn onto the back flap. Make sure this cover is installed onto the driver side.



2. **Place the Cover on the Seat**

Recline the seat back to an approx 60 degree angle. This will make it easier to install. Place the bottom cover over the seat, and start to move the cover around so that its matches up to the seat shape. Start to pull the front of the cover around the front of the seat.



3. **Attach the Front of the Cover**

Once the cover is sitting fairly correct, remove the protective fleece strips from under the cover, and attach the hook strip on the cover to the carpet on the bottom of the seat.



4. **Tuck in the Sides Under the Plastic**

Start at the front of the seat, and pull the side of the cover down so that it sits flush behind the plastic side panel on the seat. Continue to tuck the cover under along the whole side of the seat.

Tip - You can also use a plastic card or tucking tool to tuck the cover under the plastic side panel easier.



5. **Tuck in the Back Flap**

Push the back flap through the center of the seat. We have attached small fleece strips to cover so that the hook strips don't get caught on the seat material.


Then go to the back of the seat, and pull the flap all the way through.



6. **Attach the Flap to the Back of the Seat.**

Remove the protective fleece strips, pull hard on the flap, and then attach the hook strip to the carpet on the bottom side under the seat.


NOTE: For best results we recommend getting this flap as tight as you can. It will allow for less movement in the cover, and give the cover a better looking fit.

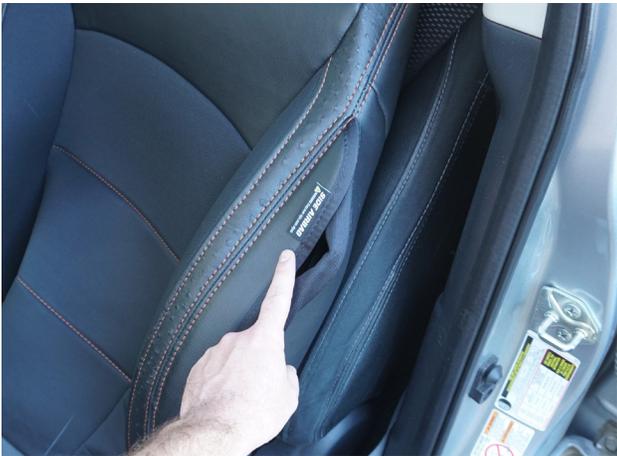

7. **Top Seat Cover Install**

Start by grabbing the Driver or Passenger Side top cover for the seat you are installing on. The Airbag flap in the seat cover should always be on the side of the seat next to the door.

Then unzip the zippers on the back of the cover so the flap is open on the back.

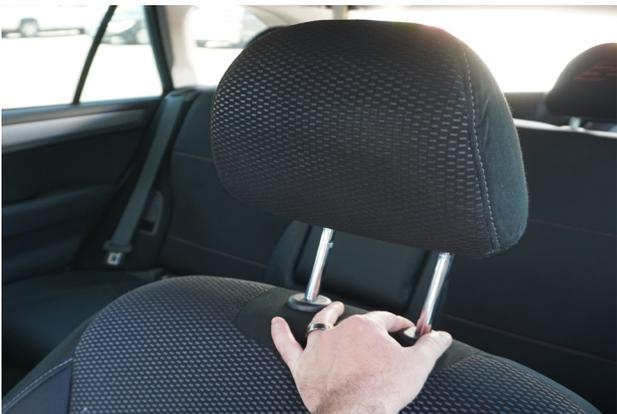

8. **Remove Headrest**

With the seat angled back to about 60 degrees, press the release button and slide the headrest up and off.



9. Install Top Seat Cover

Place the cover over the top of the seat, and start to slide it down. You will need to pull on both sides until it gets all the way down and tight on the seat.




10. Tuck the Cover Under the Headrest Slots

On the top of the seat we have two cutouts. Pull the cutout hole to one side, and tuck the hole under one corner of the plastic for the headrest slot. Then work your way around and tuck the rest of the cover hole under the plastic so it sits flush underneath. Do this on both headrest slots.




11. Tuck the Flap through the Center of the Seat

Push the flap through the center of the seat, then go to the back of the seat and pull the flap all the way through so that it is tight.

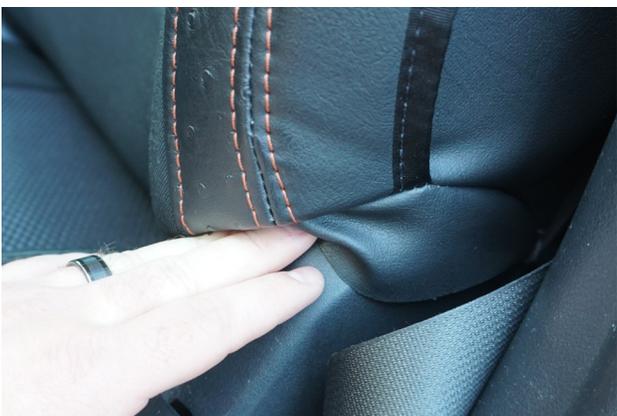

12. Tuck in the Sides of the Seat Cover

On both sides of the seat, pull the cover down so that it is tight. Then tuck the bottom sides of the cover in, around, and underneath the plastic side panel.

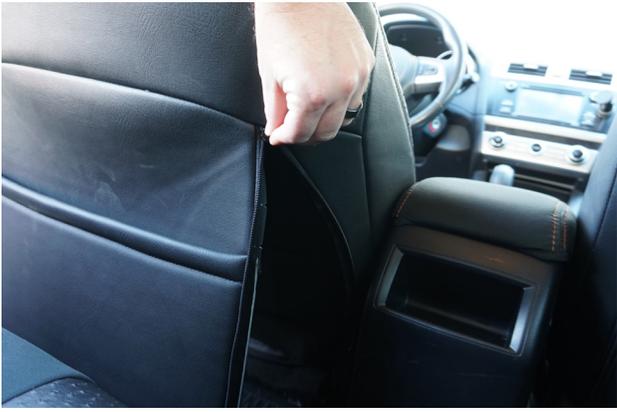

13. Close Both Zippers on the Back of the Seat

Start at the top and zip up both zippers on the back of the seat to close up the flap. Take the excess zipper end at the bottom and fold it up and underneath the seat cover to hide it.



14. Connect the Seat Back to Front

Remove the protective fleece from the hook strip on the flap. Then pull hard on the bottom flap so that its gets the cover tight, and pull down on the top flap to attach them together.

NOTE: For best results we reccomend getting this flap as tight as you can. It will allow for less movement in the cover, and give the cover a better looking fit. You can use a flat nose plyers to pull extra tight.



15. Tuck in the Airbag Flap

Slide the seat forward so that you can access the airbag. The airbag slot on the shoulder has a mesh liner that needs to be tucked underneath the vinyl, so that it sits flat on the front of the seat. Start at the top, and use your hands to tuck this mesh into & under the cover.

NOTE: Make sure the mesh lies flat on the seat to ensure that the airbag will open properly in the case of an accident.



16. Check Seat Cover Fitment

Now that the cover is all the way on, go around and push, pull, an adjust the cover as needed to make sure its fitting snugly. You can always go back and re-tighten the flaps in the back if needed. Some small wrinkles may be present, but will disapear out as you use the seats and the material smoothes out.



17. Headrest Covers Install

Grab your headrest cover and ensure its facing the correct way (logos go on front). Open up all the flaps on the bottom of the cover.

Slide the cover over the top of the headrest, and pull it down. You may also need to depress the foam and pull the cover to make it slide easier.



18. Attach Flaps Together

Once the cover is on, move it around and adjust the cover as needed so that it sits correctly on the headrest, and any logos are level.

Start to attach the flaps on the bottom.

First attach the two side flaps together.

Then connect the larger center flap on the back of the headrest to the hook&loop strip on the front.

Finally attach the two outside smaller flaps back to front.

You can readjust the material and flaps as needed until everything looks smooth and tight.



19. Re-Install Headrests

Slide the headrests back onto the seat, and push them down to the preferred height.



17. Install Passenger Side

Repeat Steps 1-16 to install the seat covers on the passenger side.

18. ... And You're All Done!

If you have any questions or experience issues, please contact your retail outlet first for help. However, the staff at PRP Seats is always happy to assist you.

1-800-317-6253.

customerservice@prpseats.com

Thank you! Drive safe!