

Front Seat Covers for 2018+ Jeep JL

Install Instructions



Parts

A.



B.



C.



Read through all of the instructions completely before beginning the install.

Parts Included:

A. 2 Seat Back Covers (Driver and Passenger)

B. 2 Seat Base Covers (Driver and Passenger)

C. 2 Head Rest Covers (Driver and Passenger)

Tools Required:

T-50 Torx

Philips Head Screwdriver

Remove all parts from the box and unwrap completely.

Time:

Approx 2 hours.



1. Start by removing the seat covers from the packaging and place them out in the sun for an hour or so. This will let the material warm up and stretch out, getting rid of most wrinkles in the cover and allowing it to easily be put on the seat.




2. Take the headrest off by pushing the two buttons on the seat in and lifting the headrest up and off.




3. If you have the Rubicon edition, take off the back molle piece.

Lift the back flap up and use a Phillips Head to unscrew the (2) screws holding the piece to the seat. Then, pull the plastic down and off to remove it.

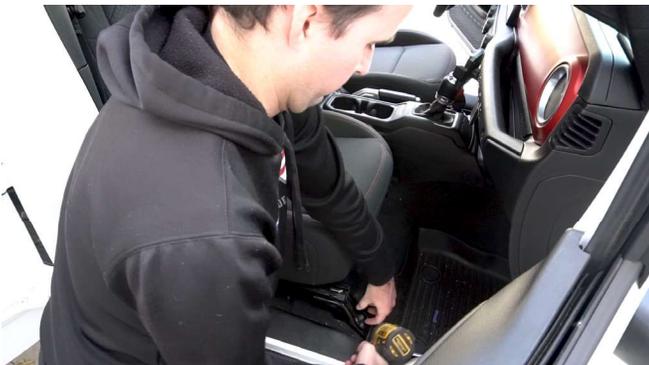

4. Unbolt the (4) bolts holding the seat to the floor with a T-50 Torx. For 4 door JL's you can install the covers with the seat still in the vehicle. For 2 Door JL's (that don't have as much space) we recommend removing the seat completely.

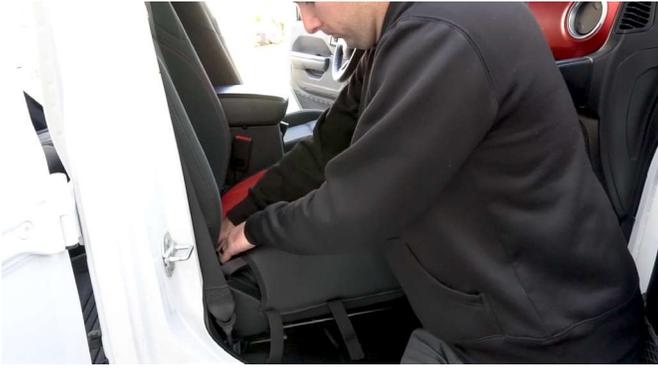

5. Place the corresponding seat base cover over the seat. (Driver and Passenger covers have holes cut on the outside for the adjustment handles). Pull the sides around the seat and tuck the back flap through the center of the seat.



6. Push the elastic bands through the sides of the seat, making sure that they go through on top of the slider (otherwise it will catch). Tip the seat back and do so for the inside bands.



7. After all the straps have been inserted, attach each strap to the opposite side using the velcro strips on each end. The two J-Hooks on the front corners of each cover attach to the corresponding holes in the metal plate under the seat.



8. Then take the elastic bands that are attached to the front of the cover and stick them to the back Velcro. Make sure to run these straps over the horizontal metal bars under the seat.



9. Slip the top cover over the seat, making sure the airbag opening faces the outside of the vehicle. Take the bottom flap and feed it through the seat to the back. Around the headrest slots, (and release handle on 2 door models) take the material and push it around and underneath the plastic. Then zip up the side, and tuck the excess zipper underneath the plastic.



10. For the Sport/Sport S, Sahara, or Moab edition - go the back of the seat and pull the cover the rest of the way through. Lift the stock back flap up, and tuck it underneath the cover. Then take both ends of the cover and attach the velcro strips together. Readjust the covers as needed so that it fits tight, and lines up with the bottom cover.



11. For the Rubicon edition -go the back of the seat and pull the cover the rest of the way through. Then take both ends of the cover and attach the velcro strips together. Reattach the plastic Molle back to the seat by pushing it in and up, so that all the clips in the back reattach. Replace the (2) screws using a Phillips Screwdriver.



12. On the outside shoulder of each seat is the airbag slot. Take the thinner mesh material and tuck it underneath the cover, so that it lies flat beneath the front side of the seat. Start at the top and work the material in as you go down, so that there are no large wrinkles in the material. *****WARNING***** if not done properly, the airbag may deploy incorrectly.



13. Bolt the seat back in with the stock bolts using a T-50 Torx. (make sure to re-attach any wiring harnesses if you removed the entire seat from the vehicle.)



14. Slip the cover over the headrest, making sure that the PRP logo is facing the front. Once pulled all the way down, attach the Velcro strips together to secure the cover to the headrest. Then slip the headrest onto the seat.



15. Repeat this process for the other seat.